

1. Easy Simple PSK セットアップ

The screenshot shows the 'Controller EasyS(Simple) ver 01B Oct 2021 by JQ1HDR test 09/05' window. The 'Setting' tab is active. Key settings include: '自局のコール' (JQ1HDR), '運用バンド' (7.172MHz-QSO3), 'モード' (FT8, PSK(Vari) checked), '受信データ' (mitti), and 'PSK=C:\Controller_EasyS\Easy\PSK'. Red circles highlight specific areas: ① points to the 'PSK(Vari)' checkbox, ② points to the 'Who is On Air' checkbox, ③ points to the PSK folder path, and ④ points to the 'PSKフォルダー変更' button in the 'ReSet' section.

Controller EasyS(Simple) ver 01B Oct 2021 by JQ1HDR test 09/05

Setting TX RX Wall DigiSite

自局のコール JQ1HDR ☒ Japanese ☒ デジサイト使用 ☐ SSTV運用

運用バンド 7.172MHz-QSO3 ☒ Who is On Air

使用プログラム

☒ JTDX ☐ WSJT-X Log C:\Users\PCUser\AppData\Local\JTDX - ig-name=FT950 Set

モード ① ☒ FT8 ☒ PSK(Vari) ☒ QSO

☐ MSK144 (15s) ☒ Short TX

TX 画像サイズ

最大幅 1600 最大高さ 960

☒ 小さな画像の拡大取り込み

プログラムの状況

PSK=C:\Controller_EasyS\Easy\PSK ③

レポートシステムが起動しました。

JQ1HDR-7.172MHz-QSO3_Es1.0.0

*** Folder OK ***

*** URL Master OK ***Registered

*** プログラムスタート ***

受信データ

mitti Transmitting JQ1HDR

10:10:24 UTC

マクロ時刻

☒ UTC ☐ Peanut On/Off

☒ Easy受信画像保存数 100

☒ SSTV受信画像保存数 100

☒ FT8/MSK受信時RXタブに移動

☐ SSTV受信時YoniQRXタブに移動

☐ HTML受信 ☐ HTML送信

パラメーター設定

受信タイミング sec 2 JTDX Log 202109 ☐ JTDX/WSJT-Xのマクロを使用 1

デジサイトサーバ設定

登録名称 設定保存

FTPサーバ

ID

パスワード

ディレクトリ

デジサイトURL

☐ ID/パスワード表示 ☐ デジサイトをリフレッシュしない 0

マスター設定

名前登録

拒否局登録

マスター更新

ReSet


TX画像リセット

SSTV画像リセット

PSKフォルダー変更 ④

Easy Simple と Vari Image Front を結びつける方法

- ① PSK(Vari)にチェックを入れる
- ② Who is On Air にチェックを入れる
- ③ Wari からの信号フォルダーが表示される
初期値は C:\Controller_EasyS\Easy\PSK となっています
このまま使用の場合は Vari Image Front の設定を変更します
次のページの Vari Image Front をご覧ください
- ④ Vari Image Front の設定が Easy64 の設定になっている場合は
④ PSK フォルダーの変更を押して
フォルダー JT65-HF-Controller を選んでください。

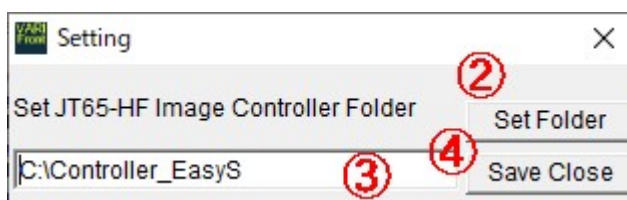

Vari Image Front の設定

- ① Setting をクリックし JH65-HF-Controller をクリックする
- ② Set Folder をクリックし、 Easy Simple のインストールフォルダーを選ぶ
- ③ Easy Simple のインストールフォルダーであることを確認する
- ④ Save Close をクリックし設定を保存する。

なお、Easy64 等の設定で使用する場合は変更不要です

これで Easy Simple と Vari Image Front の設定は完了です。

1 Easy Simple PSK Set Up

The screenshot shows the 'Controller EasyS(Simple) ver 01B Oct 2021 by JQ1HDR test 09/05' window. The 'Setting' tab is active, with sub-tabs for TX, RX, Wall, and DigiSite. The 'My Call' field is set to 'JQ1HDR'. The 'On Air Band' is set to '7.172MHz-QSO3'. The 'Used Program' section shows 'JTDX' selected. The 'Mode' section has 'FT8' selected, with 'PSK(Vari)' and 'QSO' checked. The 'TX Picture Size' section shows 'Max Width' at 1600 and 'Max Height' at 960. The 'Program Status' section displays a log of events, including 'PSK=C:\Controller_EasyS\Easy\PSK' and 'レポートシステムが起動しました。'. The 'Received Data' section shows 'mitti' and 'Transmitting JQ1HDR'. The 'Parameter Setting' section shows 'Decode Timing sec' at 2 and 'JTDX Log' at 202109. The 'DigiSite Server Setting' section includes fields for 'DigiSite Name', 'FTP server', 'ID', 'Password', 'Dir', and 'DigiSite URL'. The 'Master Setting' section includes buttons for 'Name List', 'Refuse List', 'Refresh Master', 'ReSet', 'TX Image Reset', 'SSTV Image Reset', and 'PSK Folder Change'.

Setting TX RX Wall DigiSite

My Call JQ1HDR ☐ Japanese ☒ Use DigiSite ☐ Use SSTV

On Air Band 7.172MHz-QSO3 ☒ Who is On Air

Used Program

☒ JTDX ☐ WSJT-X Log C:\Users\PCUser\AppData\Local\JTDX - ig-name=FT950 Set

Mode

☒ FT8 ☒ PSK(Vari) ☒ QSO

☐ MSK144 (15s) ☒ Short TX

TX Picture Size

Max Width 1600 Max Height 960

☒ Expansion when smaller pic is loaded

Program Status

PSK=C:\Controller_EasyS\Easy\PSK
レポートシステムが起動しました。
JQ1HDR-7.172MHz-QSO3_Es1.0.0
*** Folder OK ***
*** URL Master OK ***Registered
*** プログラム、スタート ***

Received Data

mitti Transmitting JQ1HDR

Parameter Setting

Decode Timing sec 2 JTDX Log 202109 ☐ Use JTDX/WSJT-X Macro 1

DigiSite Server Setting

DigiSite Name Save

FTP server

ID

Password

Dir

DigiSite URL

☐ Show ID/Pswd ☐ No Refresh DigiSite 0

Master Setting

Name List

Refuse List

Refresh Master

ReSet


TX Image Reset

SSTV Image Reset

PSK Folder Change

How to connect Vari Image Front to Easy Simple

- ① Check PSK (Vari)
- ② Check Who is On Air
- ③ The signal folder from Wari is displayed The initial value is C:\¥ Controller_EasyS ¥ Easy ¥ PSK. If you want to use it as it is, change the settings of Vari Image Front. Please see Vari Image Front on the next page
- ④ If the Vari Image Front setting is Easy64 setting ④ Press Change PSK Folder Please select the folder JT65-HF-Controller.

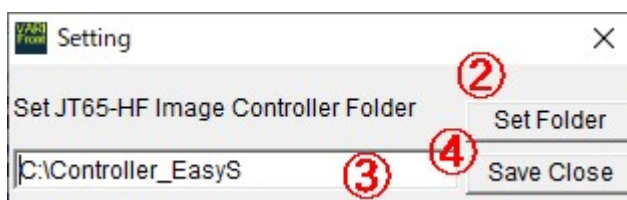

Vari Image Front settings

- ① Click Setting and click JH65-HF-Controller
- ② Click Set Folder and select the Easy Simple installation folder.
- ③ Confirm that it is the Easy Simple installation folder.
- ④ Click Save Close to save the settings.

No change is required when using with Easy64 settings.

This completes the Easy Simple and Vari Image Front settings.